

Polarimetry of Terahertz Pulses from two-color plasma

Domenico Paparo^{1,5*}, Ammar Hideur², Jonathan Houard³, Anna Martinez^{1,4}, Andrea Rubano^{1,5}, Angela Vella³

¹ISASI, Consiglio Nazionale delle Ricerche, Pozzuoli 80078, Italy; domenico.paparo@cnr.it

²CORIA CNRS, INSA, Univ. de Rouen Normandie, 76801 Saint Etienne du Rouvray, France; hideur@coria.fr

³Univ. Rouen Normandie, INSA, CNRS, GPM UMR 6634, F-76000 Rouen, France; angela.vella@univ-rouen.fr; jonathan.houard@univ-rouen.fr

⁴Scuola Superiore Meridionale, Largo San Marcellino, 80138 Napoli, Italy; anna.martinez@unina.it

⁵Dipartimento di Fisica "Ettore Pancini," Università di Napoli "Federico II," Napoli 80126, Italy; andrea.rubano.80@gmail.com

Terahertz (THz) generation by two-color plasma has garnered attention for its capacity of providing intense and ultra-broadband THz pulses. Like any form of electromagnetic radiation, controlling wave polarization is crucial for a wide range of applications [1]. However, accurately characterizing and selectively controlling the polarization of broadband THz pulses remains challenging due to limitations in efficient optics.

On the detection side, THz air-biased coherent detection has emerged as a promising solution, employing heterodyne detection and second-harmonic generation (SHG) induced by THz radiation [2]. Nevertheless, recent research has revealed that the laser-induced air plasma in this technique can exhibit birefringence, introducing systematic errors in polarization-state determination [3]. In a recent publication [4], we have proposed a simplified approach that uses a weak probe beam and avoids high-voltage DC bias fields. Unlike the terahertz air-biased coherent detection scheme, our approach provides a unipolar, intensity-proportional signal for SHG. Therefore, we have named this technique THz Unipolar Polarimetry (TUP). In Fig. 1a an example of TUP measurement is shown. In this presentation we will demonstrate the absence of induced birefringence in air in this experimental approach, ensuring accurate measurements of the polarization state of ultra-wideband THz pulses.

Regarding the control, we act on the two-colors process by varying the fundamental wave (FW) chirp and the phase difference between the FW and the second-harmonic wave (SHW). These parameters are key factors in controlling different properties of the generated THz pulses: temporal shape, energy, and the polarization state. Specifically, our findings indicate that an elliptical THz polarization can be achieved under conditions where the chirp is optimized for maximum generation efficiency. Furthermore, under these optimized conditions, we observed that as the phase difference between the FW and SHW is increased, the polarization axis of the ellipse undergoes counterclockwise rotation. Nevertheless, measurements conducted with chirp values falling outside the optimal range result in the loss of ellipticity in THz radiation, revealing polarization structures reminiscent of a 'flower' shape. In Fig. 1b we display an example of these measurements.

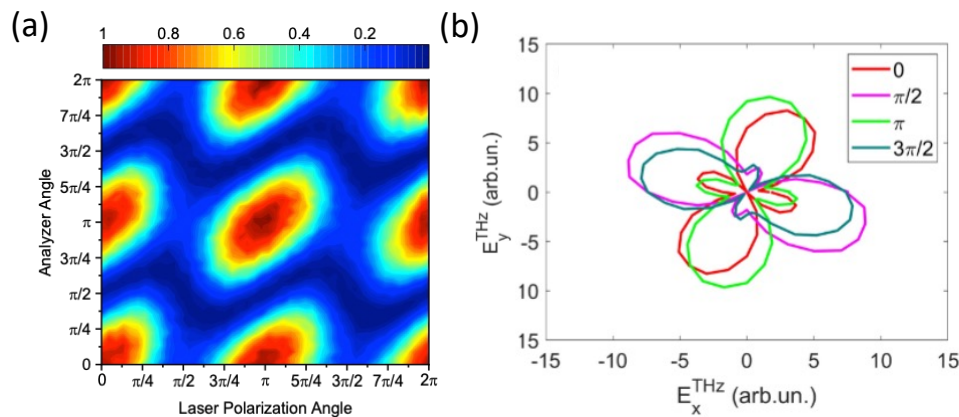


Figure 1. (a) Example of a TUP measurement. (b) Example of polarization measurement for a given chirp at different value of phase delay between the FW and SHW.

References

- [1] W. J. Choi, S. Cheng, T. B. Huang, S. Zhang, T. B. Norris, and N. A. Kotov, "Terahertz circular dichroism spectroscopy of biomaterials enabled by kirigami polarization modulators," *Nat. Mater.* 18, 820–826 (2019).
- [2] Z. H. Lu, D. W. Zhang, C. Meng, L. Sun, Z. Y. Zhou, Z. X. Zhao, and J. M. Yuan, "Polarization-sensitive air-biased-coherent-detection for terahertz wave," *Appl. Phys. Lett.* 101, 081119 (2012).
- [3] J. Zhang, "Polarization-dependent study of THz air-biased coherent detection," *Opt. Lett.* 39, 4096–4099 (2014).
- [4] S. Mou, Q. Yu, A. Rubano, D. Paparo, "Terahertz unipolar polarimetry by second-harmonic generation in air," *Appl. Phys. Lett.* 123, 071101 (2023).